





3V1系列电磁阀/3V1 Series Solenoid Valve

外形尺寸图/Main Dimensions(mm)


3V1-06

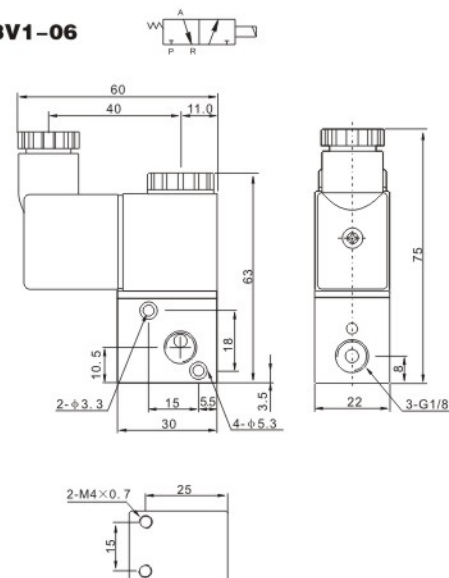


3V1-06A

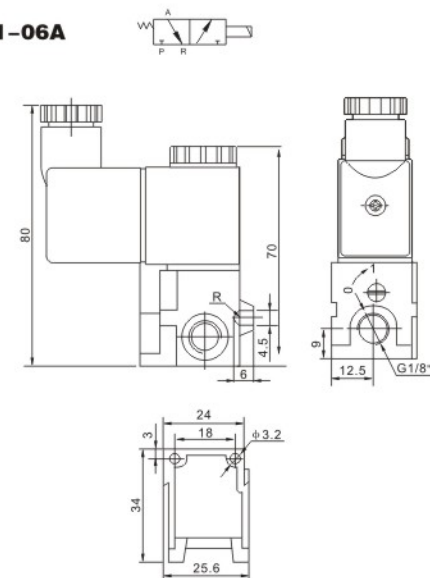


3V1-06-nF




3V1-06A-nF



3V1-06B

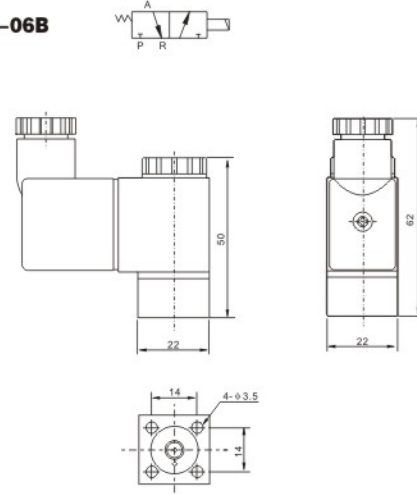

3V1-06B-nF

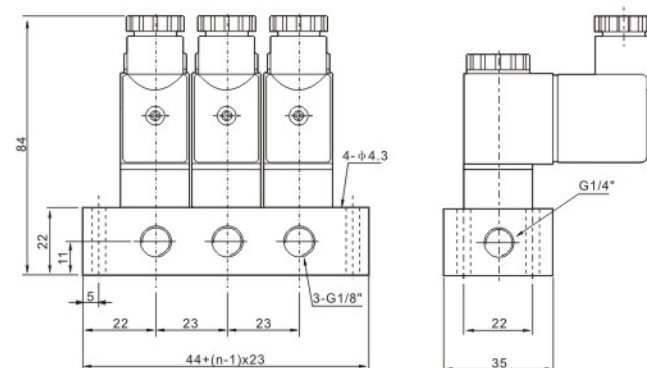


2V系列二位二通电磁阀/2V Series Two-position Two-way Solenoid Valve

订购码/Ordering Code

2V	025	06	AC110V	V
规格代码 2V:二位二通电磁阀 Specification Code 2V:Two-position Two-way Solenoid Valve	流量孔径 Aperture of Flow Rate 010:1.0mm 025:2.5mm 130:13mm 250:25mm	接管口径 Port Size M4:M4×0.7 06:G1/8" 08:G1/4" 10:G3/8" 15:G1/2" 20:G3/4" 25:G1"	标准电压 Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	油封代号 空白: NBR V: VITON(高温用) Oil Seal Code Blank:NBR V:VITON(For High temperature)

图形符号/Graphic Symbol



规格/Specifications

型号/Model	2V010-M4	2V025-06	2V025-08	2V130-10	2V130-15	2V250-20	2V250-25
工作介质 Working Medium	空气、水、油 / Air,Water,Oil						
动作方式 Motion Pattern	直动式/Direct Drive Type				先导式/Guide Type		
型式 Type	常闭型/Normal Close Type						
流量孔径 mm Aperture of Flow Rate(mm)	1.0		2.5		13		25
CV值 CV Value	0.10		0.23		6.2		23
接管口径 Port Size	M4×0.7	G1/8"	G1/4"	G3/8"	G1/2"	G3/4"	G1"
使用流体粘滞度 Operation Fluid Viscosity	20 CST (Below)						
使用压力 MPa Working-pressure	空气、水、油 /Air,Water,Oil 0.05~0.7MPa						
最大耐压力 MPa Max. Pressure Resistance	1.2			1.6		1.0	
工作温度℃ Operating Temperature Range	-10~+80℃						
使用电压范围 Voltage Range	±10%						
保护等级 Protection Class	IP65						
耗电量 Power Consumption	AC:4.5VA DC:3W						
绝缘性 Insulation	F级/F Class						
本体材质 Material of Body	铝或铜(镀镍处理)/Aluminum or Brass (Nickel coated)				黄铜/Brass		
油封材质 Material of Oil Seal	NBR或VITON/NBR or VITON				NBR或VITON /NBR or VITON		
最短励磁时间 Shortest ActivateTime	0.05 秒 /0.05 Second						

外形尺寸图/Main Dimensions(mm)

